

custom made items also available

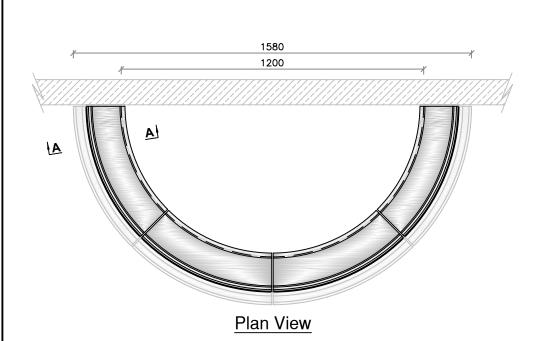

△575

△453

Kerb Detail



205 Max water level 10mmØ stainless steel dowels (not supplied) 50mm projection into stone. Holes Kerb to be drilled on site by others. Min 2No per stone grouted with a polyester resin or similar. Kerb Plinth projects Apply Unibond or similar in accordance with 50mm further out than manufacturer's instructions (prior to rendering) Kerb Plinth the Kerb Waterproof render or asphalt to client's design Finished **Ground Level**

To guard against frost damage, drain off the water at the beginning of November and do not replace it until the hard frost are past in the following spring

Unless otherwise stated, all materials other than stonework are to be supplied by others.

Allow 6mm for vertical and bedding joints unless otherwise stated

Fibre glass liner available for this pool surround.