




Plan View

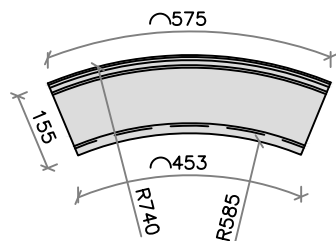

Kerb Detail

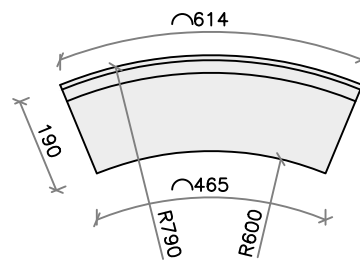

Plinth Detail

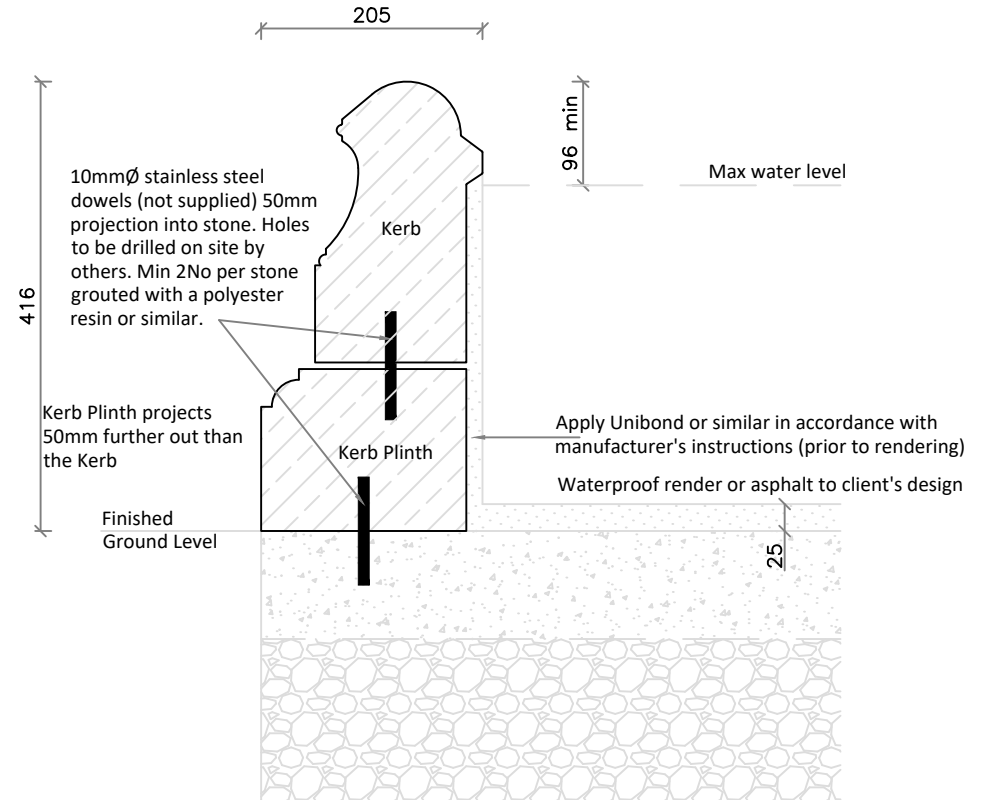

To guard against frost damage, drain off the water at the beginning of November and do not replace it until the hard frosts are past in the following spring

Unless otherwise stated, all materials other than stonework are to be supplied by others.

Allow 6mm for vertical and bedding joints unless otherwise stated